

Mini LED Flood Light

迷你LED泛光灯

- Driver-on-board Technology, DOB
- Die-cast aluminium body
- Polycarbonate lens
- Adjustable bracket for light positioning
- Luminous flux efficiency > 100lm/W
- PF=0.99, THD<10
- IP65

- 领先的AC驱动方案，DOB技术
- 高强度压铸铝本体
- 抗老化PC灯罩
- 可调节的安装支架
- 高光效输出>100lm/W
- PF=0.99, THD<10
- IP65



High quality LED chips

高品质LED光源

Polycarbonate diffuser

Provides added protection and optimum light output

PC扩散板
保护光源，高透光性，高光效输出

Robust construction

Premium die-casting aluminum lamp body

优质压铸铝材灯体，高强度结构设计

IP 65 rated

Sealed with O-ring and IP65 connectors


IP65防护等级
硅胶圈密封结构，IP65防水连接器

Adjustable angle


To allow creative lighting with angle

to vertical line

可调节角度安装支架
根据光照射方向需要，调节安装支架

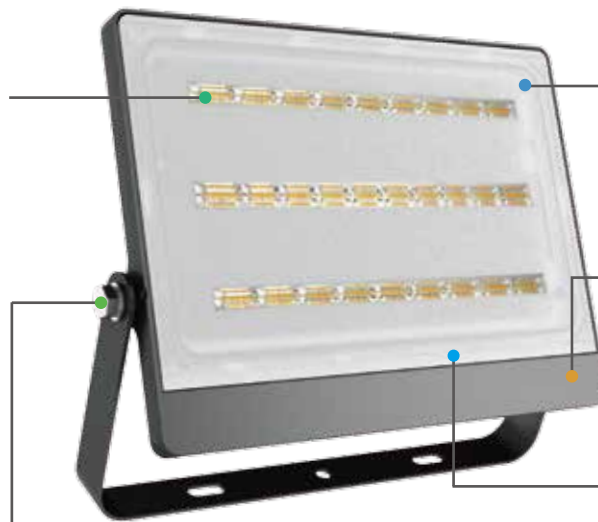

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Model No. 型号
30W	82	30x90°	3000lm	4000K	FLA30-4000K
			3000lm	5000K	FLA30-5000K
50W	82	30x90°	5000lm	4000K	FLA50-4000K
			5000lm	5000K	FLA50-5000K




Input Voltage / 输入电压 : 220-240V Power Factor / 功率因数: 0.99
 Weight / 重量 : 1200g Dimensions / 尺寸: 270x201x36mm



FLA70/100

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Model No. 型号
70W	82	30x90°	7000lm	4000K	FLA70-4000K
			7000lm	5000K	FLA70-5000K
100W	82	30x90°	10000lm	4000K	FLA100-4000K
			10000lm	5000K	FLA100-5000K



Input Voltage / 输入电压 : 220-240V Power Factor / 功率因数: 0.99
 Weight / 重量 : 2000g Dimensions / 尺寸: 343x286x43mm

