



# Integrated LED Downlight

## 一体化筒灯

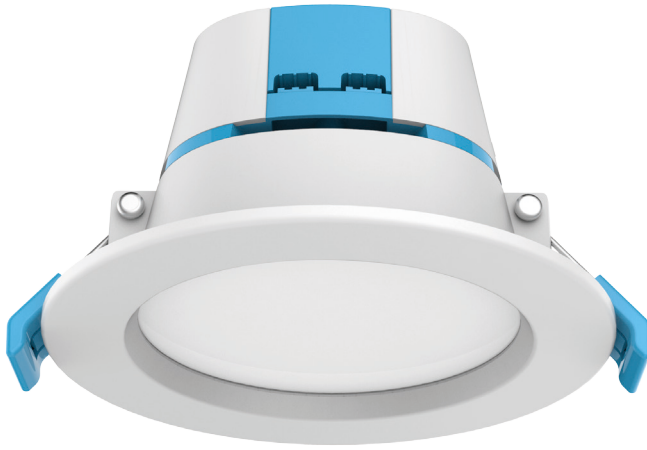


Select colour temperature with DIP switch  
拨码调节色温



### Features / 产品特点

- Select colour temperature with DIP switch
  - Thermal conductive PBT covered aluminium body
  - Polycarbonate diffuser
  - Class II luminaire
  - High efficiency SMD LED chips
  - Built-in leading edge or trailing edge dimmable LED driver
  - Integrated design, easy installaion
  - High power factor >0.95
  - IP44 rated
  - Long life, average 30,000 hours
- 拨码调节色温
  - 导热PBT包铝散热技术
  - 抗老化PC扩散板
  - 防触电等级 II 类
  - 高光效LED芯片
  - 内置前切相或后切相调光LED驱动器
  - 一体化设计, 便捷安装
  - 高功率因数>0.95
  - IP44防护等级
  - 长寿命30,000小时



### D813TC

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Model No. 型号
9W	82	100°	770lm/880lm/850lm	3000K/4000K/5700K	D813TC



Input Voltage / 输入电压 : 220-240V    Power Factor / 功率因数: 0.95  
Weight / 重量 : 140g    Dimensions / 尺寸: Ø103x58mm

