

# LED Track Light

## 轨道灯




### Features / 产品特点

- The professional choice for replacing Metal Halide
- Three wired track light
- Extruded aluminium spotlight housing
- Simple and elegant appearance
- Flicker-free
- Anti-glare reflector design, UGR<15
- Lock design for reflector, easy replacement of reflector for angles
- Spotlight head rotates through 350°, pivots through 90°
- Service life up to 50,000 hours at 70 % luminous flux
- 专业商业照明，替换传统金卤灯
- 三线轨道设计
- 本体铝挤型材高效散热
- 简洁大方外观工业设计
- 无频闪驱动
- 防眩光铝反光杯，UGR<15
- 反光杯扣装结构，方便角度更换
- 灯体350° 旋转，90° 摆头调节，全方位照射
- 使用寿命长达50,000小时

TL31

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Fitting Colour 颜色	Model No. 型号
12W	80	▲ 24°	1000lm	3000K	White	TL31-12W-830-24-W
			950lm	3000K	Black	TL31-12W-830-24-B
			1000lm	4000K	White	TL31-12W-840-24-W
			950lm	4000K	Black	TL31-12W-840-24-B
		▲ 36°	1000lm	3000K	White	TL31-12W-830-36-W
			950lm	3000K	Black	TL31-12W-830-36-B
			1000lm	4000K	White	TL31-12W-840-36-W
			950lm	4000K	Black	TL31-12W-840-36-B
		▲ 60°	1000lm	3000K	White	TL31-12W-830-60-W
			950lm	3000K	Black	TL31-12W-830-60-B
			1000lm	4000K	White	TL31-12W-840-60-W
			950lm	4000K	Black	TL31-12W-840-60-B

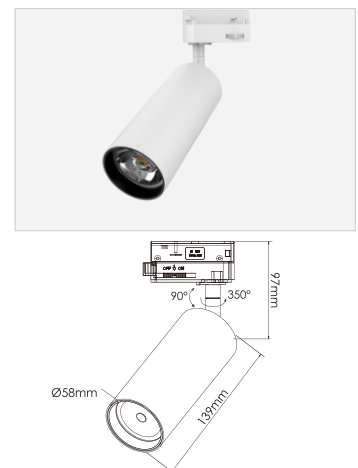

Input Volatage/ 输入电压 : 220-240V Power Factor/ 功率因数: 0.95

Weight / 重量 : 450g

Dimensions / 尺寸 : Ø58x139x97mm

