



Three colours in one fitting, IP54 Rated

一灯三色温, IP54防护等级

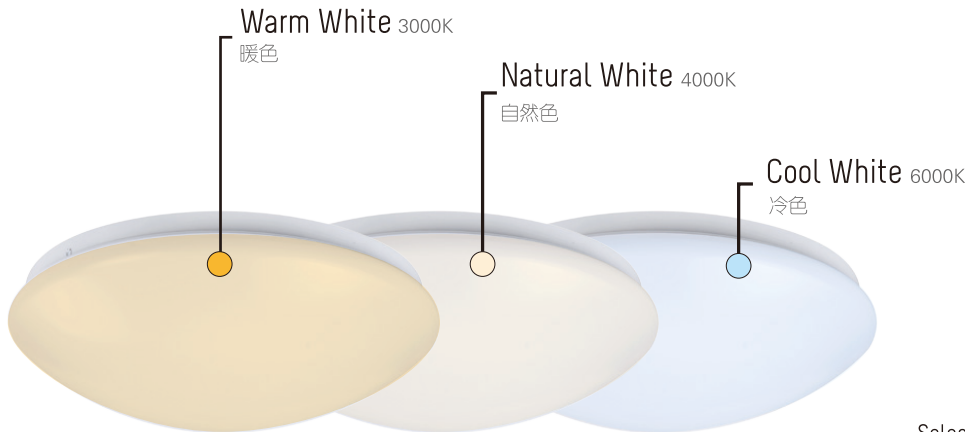

Select colour temperature with DIP switch
拨码调节色温


CC300 IP54

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Model No. 型号
17W	82	120°	1400lm/1580lm/1500lm	3000K/4200K/6000K	CC300 IP54



Input Voltage / 输入电压: 220-240V Power Factor / 功率因数: 0.95
Weight / 重量: 520g Dimensions / 尺寸: Ø300x93mm

PMMA diffuser
PMMA灯罩




CC350 IP54

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Model No. 型号
20W	82	120°	1640lm/1800lm/1760lm	3000K/4200K/6000K	CC350 IP54



Input Voltage / 输入电压: 220-240V Power Factor / 功率因数: 0.95
Weight / 重量: 730g Dimensions / 尺寸: Ø350x108mm

PMMA diffuser
PMMA灯罩




CC400 IP54

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Model No. 型号
24W	82	120°	2100lm/2350lm/2230lm	3000K/4200K/6000K	CC400 IP54
24W	82	120°	2100lm/2350lm/2230lm	3000K/4200K/6000K	CC400 IP54-MS ¹
24W	82	120°	2100lm/2350lm/2230lm	3000K/4200K/6000K	CC400 IP54-EM ²



Input Voltage / 输入电压: 220-240V Power Factor / 功率因数: 0.95
Weight / 重量: 945g Dimensions / 尺寸: Ø400x122mm

PMMA diffuser
PMMA灯罩



*1. Motion sensor / 微波感应 *2. Emergency / 应急