


Uniform light output without spots and build to last without yellowing

出光均匀，耐用无黄变

- LED Direct-lit solution avoid yellowing of LGP
- TV lightbar optical technology provides uniform light output
- Seamless welding aluminium frame with powder coated finish
- Ultra slim design
- Flicker-free LED driver
- High efficiency LED chips, 100lm/W
- IP44 rated

- 直下式正面发光，无侧发光黄变隐患
- 电视透镜光学技术，出光均匀无亮斑
- 铝边框，无缝焊接，表面防腐蚀粉末喷涂
- 超薄设计，美观实用
- 外置无频闪隔离电源，健康安全可靠
- 高光效LED，100lm/W
- IP44防护等级

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Fitting Colour 颜色	Model No. 型号
40W	80	110°	4000lm	4000K	White	PLD6060-40W-4000K
		100°	3600lm	4000K	White	PLDU6060-40W-4000K ₁

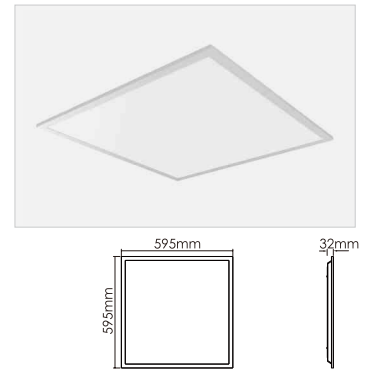


Current / 电流: 1050mA Voltage / 电压: 36V
 Weight / 重量: 1900g Dimensions / 尺寸: 595x595x32mm



PLD6262

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Fitting Colour 颜色	Model No. 型号
40W	80	110°	4000lm	4000K	White	PLD6262-40W-4000K
		100°	3600lm	4000K	White	PLDU6262-40W-4000K ₁

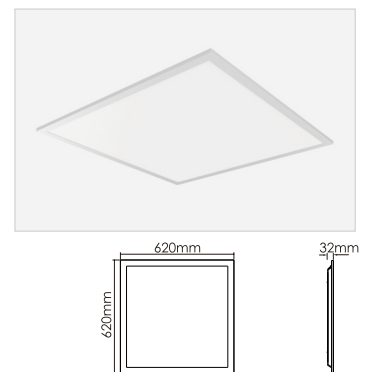


Current / 电流: 1050mA Voltage / 电压: 36V
 Weight / 重量: 2010g Dimensions / 尺寸: 620x620x32mm



PLD30120

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Fitting Colour 颜色	Model No. 型号
40W	80	110°	4000lm	4000K	White	PLD30120-40W-4000K
		100°	3600lm	4000K	White	PLDU30120-40W-4000K ₁

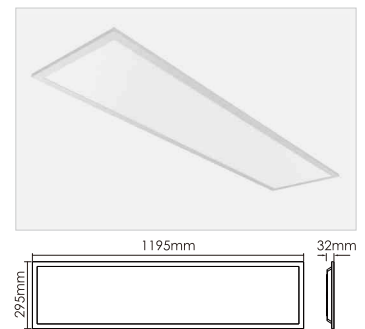


Current / 电流: 1050mA Voltage / 电压: 36V
 Weight / 重量: 2000g Dimensions / 尺寸: 295x1195x32mm



PLD60120

Power 功率	CRI 显色指数	Beam Angles 光束角	Lumens 流明	CCT 色温	Fitting Colour 颜色	Model No. 型号
56W	80	110°	5600lm	4000K	White	PLD60120-56W-4000K
		100°	5040lm	4000K	White	PLDU60120-56W-4000K ₁

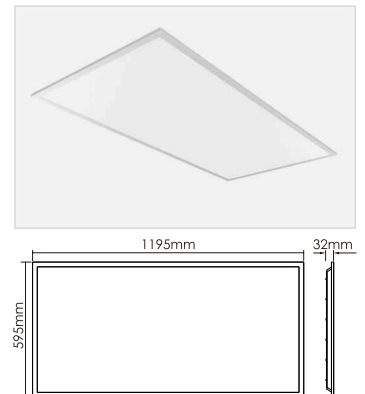

Current / 电流: 1400mA Voltage / 电压: 36V
 Weight / 重量: 3750g Dimensions / 尺寸: 595x1195x32mm

